



Airport	Göteborg Landvetter Airport
Location	Located in the arrival hall into the check-in hall and airport exit
Name	GOT-267
Number of faces	Special
Format	See appendix
Gross price / month	140 000 SEK
Installation	Not included
Campaign period	Monthly
Material deadline	Minimum 5 working days before campaign start

# Specifications sheet

GOT-267

**Delivery address:**

Swedavia AB  
c/o SPIRIT Air Cargo Flygfraktsvägen 7  
Fraktzon A uppgång C  
438 70 Landvetter  
ATT: Therese Henke  
Delivery: Monday to Friday, 06:00-22:00

**Contact:**

Therese Henke  
070- 616 18 42  
therese.henke@swedavia.se  
The material must be delivered no later than  
five working days before campaign start.

**Technical details:**

Description of location:  
Customs screening point.

**Type of sign:**

Fabric frames and foil on walls.

**Space visible/image area (for original production):**

See appendix.

**Production dimensions (including construction):**

See appendix.

**Material (All material must be fire-classified):**

Removable vinyl. B1 flammability class as per DIN 4102, or flammability  
class EN ISO 11925-2.

**NOTE:** due to the placement of the advertisement product on airside the installation  
needs to be approved by the airport and security department before production/  
installation.

**Packaging and marking: (Delivered in postertube)**


The material must be clearly marked with the advertiser, campaign period, subject and  
index number, as well as a picture of the subject. The material must also be clearly marked  
with the airport contact person.

**Production:**

Since it is complicated to produce this product, production may only be carried out by a  
printing firm with enough knowledge about these systems. Contact Swedavia for further  
information.

## Appendix 1

GOT-267

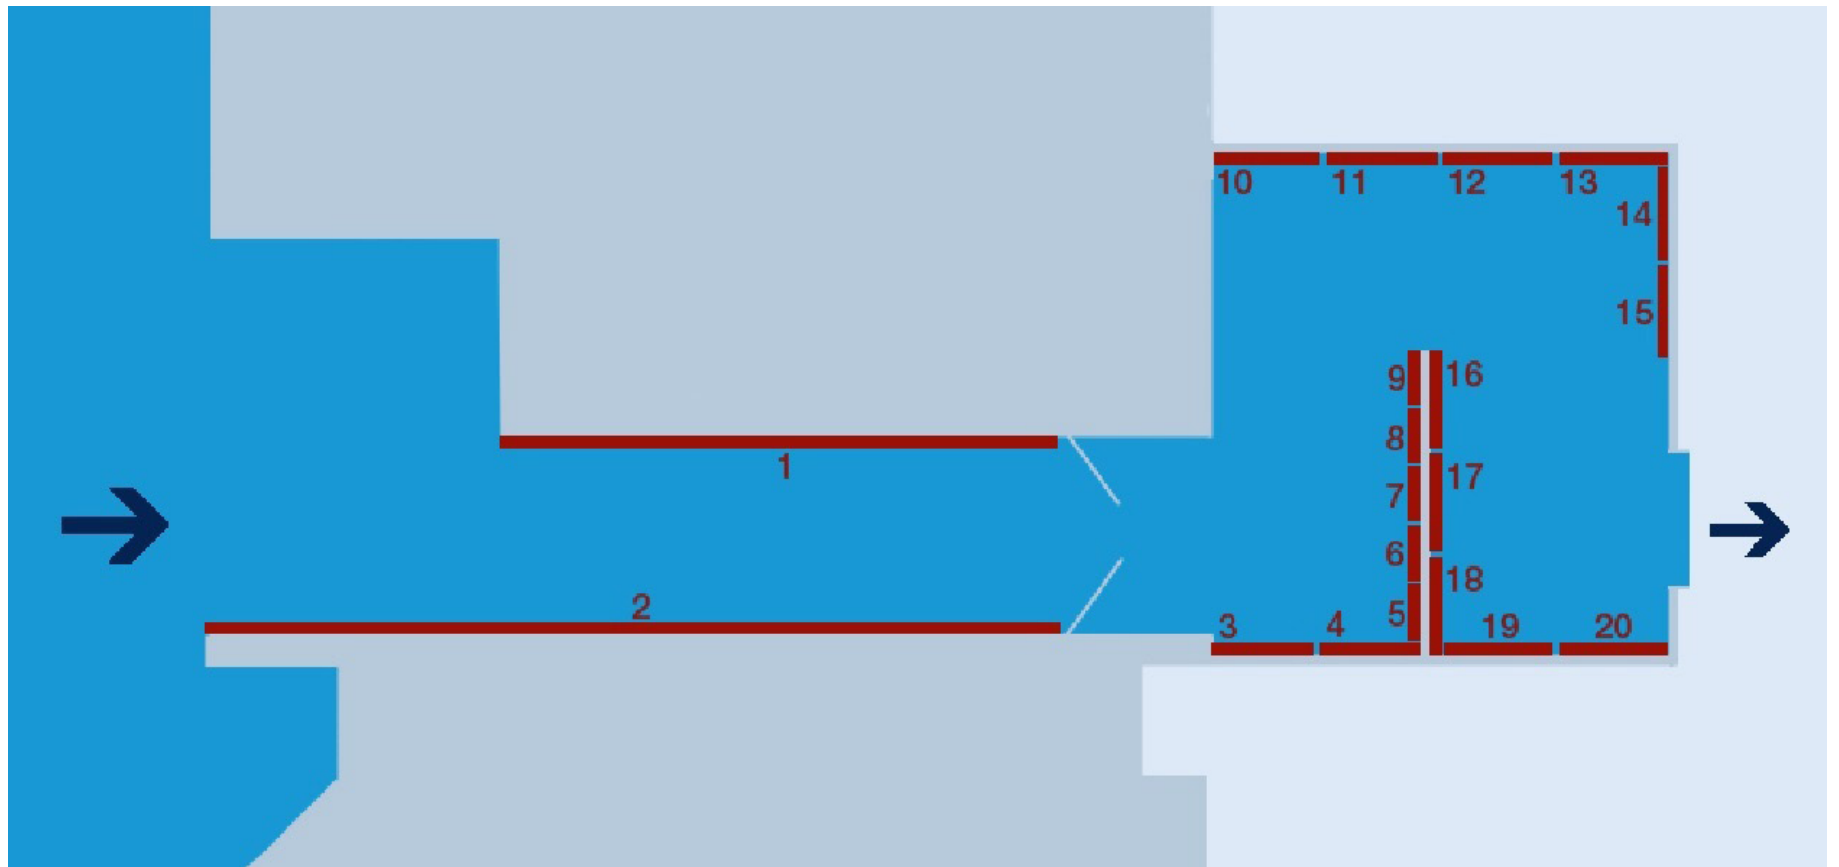

Swedavia  
Airports

## Appendix 2

GOT-267

Sektion 1 (se skiss i bilaga 1):

Antal: 1

Typ av skylt:  
Fabric frame.

Synlig yta/bildyta (för originalproduktion):  
4 680 x 1 520 mm.

Produktionsmått (inklusive konfektion):  
4 680 x 1 520 mm + utfall för silikonlist.

Material (Alla material ska vara brandklassade):  
Tjock polyester 220g. Brandklass B1 enligt DIN 4102.

Konfektion:  
Sydd silikonlist, 14 x 3 mm, runtom.

Section 1 (see plan in appendix 1):

Quantity: 1

Type of sign:  
Fabric frame.

Space visible/image area (for original production):  
4 680 x 1 520 mm.

Production dimensions (including construction):  
4 680 x 1 520 mm + bleed for silicone edge.

Material (All material must be fire-classified):  
Thick polyester 220g. B1 flammability class as per DIN 4102.

Construction:  
Silicone edge, 14 x 3 mm, sewn to all borders.

Sektion 2 (se skiss i bilaga 1):

Antal: 1

Typ av skylt:  
Fabric frame.

Synlig yta/bildyta (för originalproduktion):  
9 810 x 1 520 mm.

Produktionsmått (inklusive konfektion):  
9 810 x 1 520 mm + utfall för silikonlist.

Material (Alla material ska vara brandklassade):  
Tjock polyester 220g. Brandklass B1 enligt DIN 4102.

Konfektion:  
Sydd silikonlist, 14 x 3 mm, runtom.

Section 2 (see plan in appendix 1):

Quantity: 1

Type of sign:  
Fabric frame.

Space visible/image area (for original production):  
9 810 x 1 520 mm.

Production dimensions (including construction):  
9 810 x 1 520 mm + bleed for silicone edge.

Material (All material must be fire-classified):  
Thick polyester 220g. B1 flammability class as per DIN 4102.

Construction:  
Silicone edge, 14 x 3 mm, sewn to all borders.

## Appendix 3

### GOT-267

Sektion 3-9 (se skiss i bilaga 1):

**Material (Alla material ska vara brandklassade):**

Borttagbar vinyl. Brandklass B1 enligt DIN 4102 alternativt EN ISO 11925-2.

Mått ref. 3: 1 110 x 1 730 mm.

Mått ref. 4: 1 110 x 1 730 mm.

Mått ref. 5: 1 050 x 1 630 mm.

Mått ref. 6: 1 050 x 1 630 mm.

Mått ref. 7: 435 x 1 730 mm.

Mått ref. 8: 1 110 x 1 730 mm.

Mått ref. 9: 1 110 x 1 730 mm.

Section 3-9 (see plan in appendix 1):

**Material (All material must be fire-classified):** Removable vinyl. B1 flammability class as per DIN 4102, or flammability class EN ISO 11925-2.

Measurements ref. 3: 1 110 x 1 730 mm.

Measurements ref. 4: 1 110 x 1 730 mm.

Measurements ref. 5: 1 050 x 1 630 mm.

Measurements ref. 6: 1 050 x 1 630 mm.

Measurements ref. 7: 435 x 1 730 mm.

Measurements ref. 8: 1 110 x 1 730 mm.

Measurements ref. 9: 1 110 x 1 730 mm.





## Appendix 4

### GOT-267

Sektion 10-15 (se skiss i bilaga 1):

**Material (Alla material ska vara brandklassade):**

Borttagbar vinyl. Brandklass B1 enligt DIN 4102 alternativt EN ISO 11925-2.

Mått ref. 10: 1 110 x 1 730 mm.

Mått ref. 11: 1 110 x 1 730 mm.

Mått ref. 12: 1 110 x 1 730 mm.

Mått ref. 13: 1 110 x 1 730 mm.

Mått ref. 14: 200 x 1 730 mm.

Mått ref. 15: 850 x 1 730 mm.

Section 10-15 (see plan in appendix 1):

**Material (All material must be fire-classified):**

Removable vinyl. B1 flammability class as per DIN 4102, or flammability class EN ISO 11925-2.

Measurements ref. 10: 1 110 x 1 730 mm.

Measurements ref. 11: 1 110 x 1 730 mm.

Measurements ref. 12: 1 110 x 1 730 mm.

Measurements ref. 13: 1 110 x 1 730 mm.

Measurements ref. 14: 200 x 1 730 mm.

Measurements ref. 15: 850 x 1 730 mm.



## Appendix 5

### GOT-267

Sektion 16-20 (se skiss i bilaga 1):

**Material (Alla material ska vara brandklassade):**

Borttagbar vinyl. Brandklass B1 enligt DIN 4102 alternativt EN ISO 11925-2.

Mått ref. 16: 1 110 x 1 730 mm.

Mått ref. 17: 1 110 x 1 730 mm.

Mått ref. 18: 435 x 1 730 mm.

Mått ref. 19: 1 110 x 1 730 mm.

Mått ref. 20: 1 110 x 1 730 mm.

Section 16-20 (see plan in appendix 1):

**Material (All material must be fire-classified):**

Removable vinyl. B1 flammability class as per DIN 4102, or flammability class EN ISO 11925-2.

Measurements ref. 16: 1 110 x 1 730 mm.

Measurements ref. 17: 1 110 x 1 730 mm.

Measurements ref. 18: 435 x 1 730 mm.


Measurements ref. 19: 1 110 x 1 730 mm.

Measurements ref. 20: 1 110 x 1 730 mm.



# Location

GOT-267

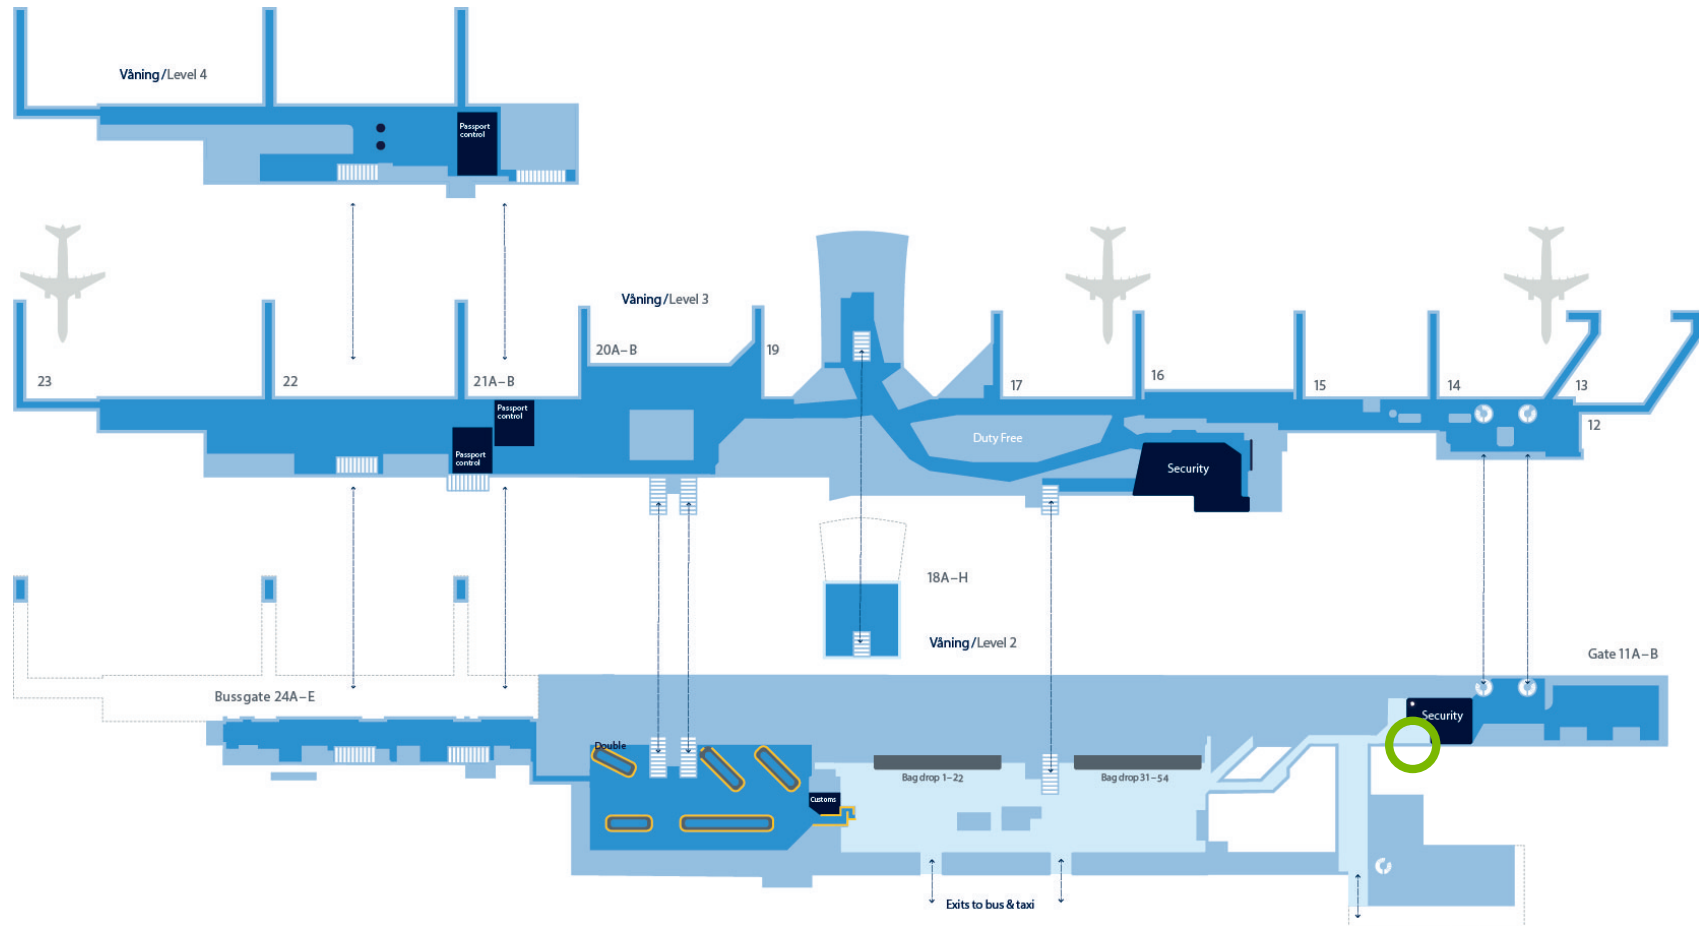

Swedavia  
Airports